



INOX LED





LED-modules:	1-4x 13W 2425lm 186lm/W
Total power:	14 / 28 / 56 W
Net flux:	2100 / 4300 / 8700 Lm (150-155 lm/W)
Color temperature:	4000K
CRI:	≥80 (other available upon request)
MacAdam:	3 SDCM
Ta:	-25°C ... +35/40°C
Electrical class:	I
Protection class:	IP66
Connection:	-0- 5x2,5mm ² (with light control -0- 7x2,5mm ²) / 1,5m connection cable + plug / 1,5m connection cable + CEE17-plug (2P+E)
Voltage:	230V AC 50-60Hz
Lifetime:	L70B10 >70.000h
Control options:	Dali / Motion detection
Housing:	Housing and lugs stainless steel AISI 304. Housing L690mm or L1300mm.
Cover:	Tempered glass (clear or satin) / Polycarbonate (clear or opal)
Weight:	3 kg (L690mm) / 7,4 kg (L1300mm)
Mounting:	Recommendable mounting height 2-6m, depending on type. Straight to ceiling, lighting suspension rail or cable tray.
Suitable brackets:	Ceiling and wall mounting; adjustable joint support pair (820000), chain suspension 9008
Applications e.g.:	Process industry, boiler rooms, agricultural facilities. Can be used as an emergency luminaire in central battery system 230V AC.
Warranty:	5 years
Electrical components replaceable:	Yes



LIGHT BEAMS

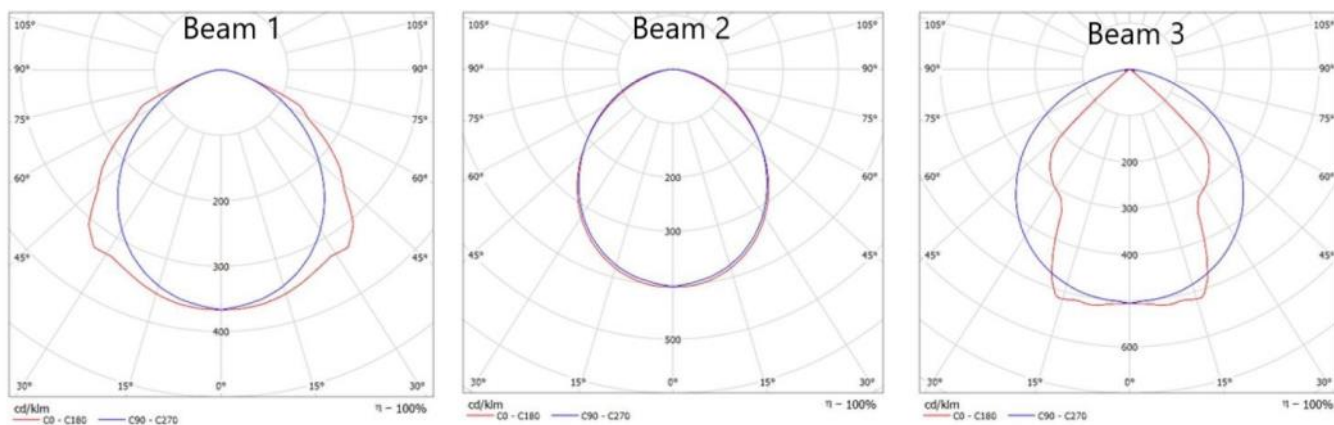

DIMENSIONS

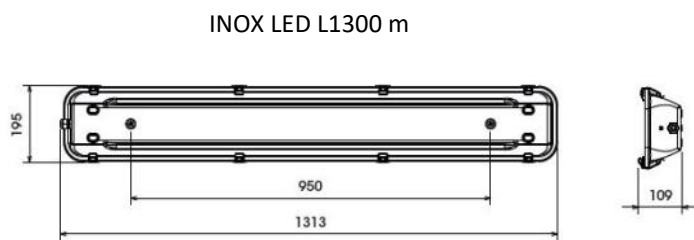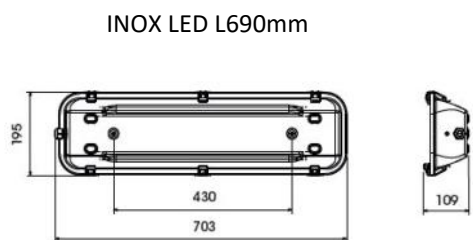

MAX LUMINAIRES / CIRCUIT BREAKER

Max. quantity / MCB				
Type	B10A	B16A	C10A	C16A
14W, 28W	21	34	33	54
56W	8	13	12	20



PRODUCT CODES

Product code	Cover	Power W	Luminaire net flux lm	Max. ta °C	Light beam	Connection
INOX LED L690mm, on/off						
017 O 35 C1	Clear PC	14	2100	40	1 = wide	-0- 5x2,5mm ²
017 O 35 D1	Opal PC	14	2100	40	1 = wide	-0- 5x2,5mm ²
017 O 39 C1	Clear glass	14	2100	40	3 = narrow	-0- 5x2,5mm ²
017 O 39 D1	Satin glass	14	2100	40	2 = wide	-0- 5x2,5mm ²
034 O 35 C1	Clear PC	28	4300	35	1 = wide	-0- 5x2,5mm ²
034 O 35 D1	Opal PC	28	4300	35	1 = wide	-0- 5x2,5mm ²
034 O 39 C1	Clear glass	28	4300	35	3 = narrow	-0- 5x2,5mm ²
034 O 39 D1	Satin glass	28	4300	35	2 = wide	-0- 5x2,5mm ²
INOX LED L1300mm, on/off						
034 O 36 C1	Clear PC	28	4300	35	1 = wide	-0- 5x2,5mm ²
034 O 36 D1	Opal PC	28	4300	35	1 = wide	-0- 5x2,5mm ²
034 O 40 C1	Clear glass	28	4300	35	3 = narrow	-0- 5x2,5mm ²
034 O 40 D1	Satin glass	28	4300	35	2 = wide	-0- 5x2,5mm ²
068 O 36 C1	Clear PC	56	8700	35	1 = wide	-0- 5x2,5mm ²
068 O 36 D1	Opal PC	56	8700	35	1 = wide	-0- 5x2,5mm ²
068 O 40 C1	Clear glass	56	8700	35	3 = narrow	-0- 5x2,5mm ²
068 O 40 D1	Satin glass	56	8700	35	2 = wide	-0- 5x2,5mm ²

OPTIONS

Option	Extra code at the end of the product code
Motion detection	LT
Dali-control	DA
Plug and 1,5m connection cable	2 (replaces the last number)
CEE17-Plug and 1,5m connection cable	17 (replaces the last number)

ACCESSORIES



Code	820000
Specification	Adjustable joint support pair 820000
Material	Stainless steel AISI 304
Adjustment	Stepless vertical orientation
Weight	0,5kg