FLOODLIGHTS

FOOTBALL LED 1200

EN

FAEBER LIGHTING SYSTEM


ENERGY SAVING

IP66 IK08 RGO

F

220-240V
50-60Hz



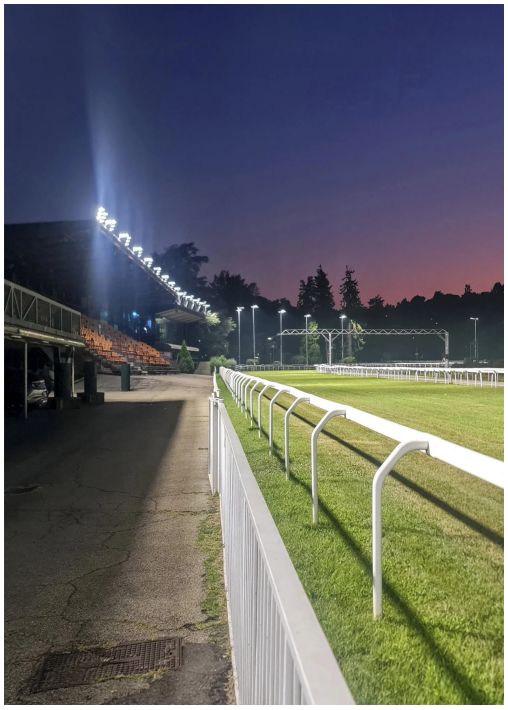


GENERAL CHARACTERISTICS

APPLICATION	Floodlights
FIXING	Bracket with tilt adjustment goniometer
WIND EXPOSURE	0.35 m²
POWER W	483-1200
FLUX Lm Out (min-max)	62400-183000
LED RANGE	S: 288-AS: 432
COLOR TEMPERATURE	4000K-5000K-5700K-RGBW
IRC	>70
INSULATION CLASS	I
DEGREE OF PROTECTION	IP66
MECHANICAL RESISTANCE	IK08
BODY	Body and frame in die-cast aluminium, polyester powder coated.
COLOR	GREY RAL 7016
GASKET	Silicone.
SCREEN	4 mm thick tempered protective glass.
ULOR	0
WEIGHT Max (Kg)	39.8
POWER SUPPLY UNIT	Power unit placed remotely at a maximum distance of 200m (SB version) or mounted on the body of the appliance on stainless steel plates (AND, AFD, ADA versions).
POWER SUPPLY	220÷240V 50/60Hz cos φ 0.95.
DRIVER PRESUMED LIFE	100.000h @ Tc life.
OVERVOLTAGE PROTECTION	Solutions with alim. on board protected with SPD placed in the junction box, or in the power supply for remote driver solution. Protected module with equipotential network. Discharge immunity level >10kV both common and differential mode.
CONNECTION	Watertight protection box located on the bracket of the appliance and equipped with a 4.0mm2 terminal block and M20 cable gland for 400W and M25 for 800-1200W.

LED MODULE

LED MODULE	S: 96 single die power LED modules. AS: 144 multi die power LED modules. Both of the latest gen.
EFFICIENCY	S: 182lm/W@1050mA AS:170lm/W@640mA 25°C.
LED USEFUL LIFE	> 100.000h L90B10.
SECONDARY OPTICS	S: Stabilized PMMA. AS: anodized aluminum reflector.

DIMENSIONS

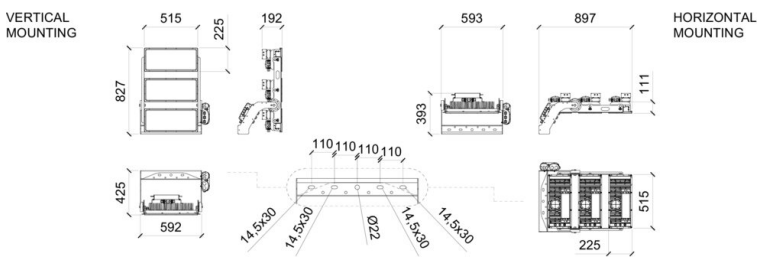

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026


Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 1200

PHOTOMETRY

Final code	Optical
1	10°
7	15°
2	20°
3	30°
4	40°
6	60°
9	90°
0	120°
A	AS

Photobiological risk group according to EN62471: EXEMPT (RG0)

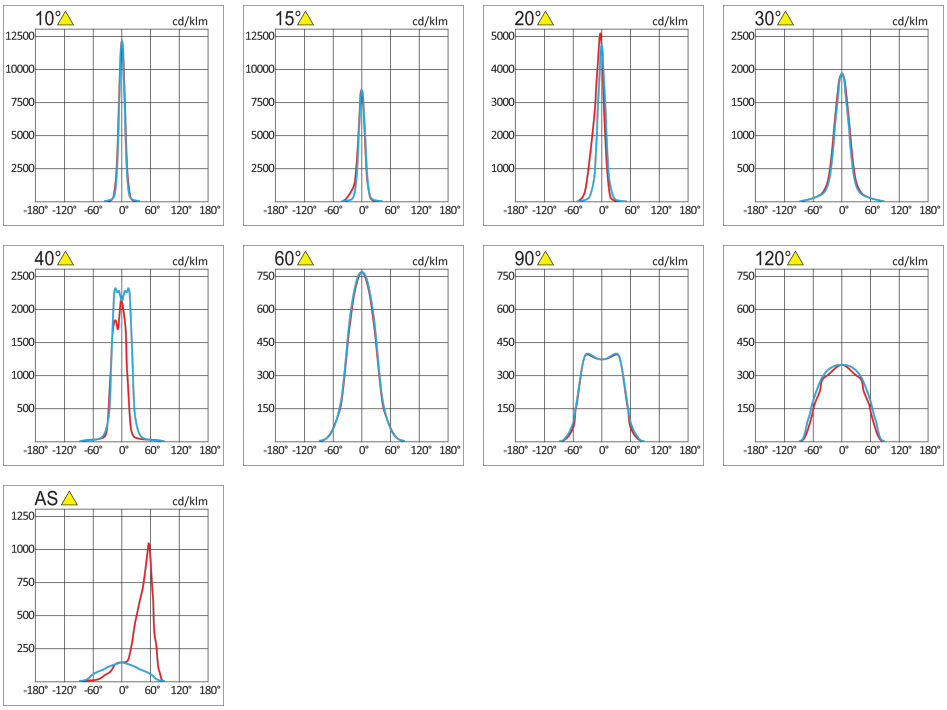

DIMMINGS

	Rset	Switch	Bipower	1-10V	Dali	CLO	Crono timer	Mains dim	Radio Waves	Conveyed Waves	Zhaga socket	Nema 7Pins	Bluetooth	DMX
AFD	/	/	/	/	/	S*	S*	/	/	/	/	/	/	
AND	/	/	/	/	/	/	/	/	/	/	/	/	/	
ADA	/	/	/	/	S*	/	/	/	/	/	/	/	/	
AAN	/	/	/	S	/	/	/	/	/	/	/	/	/	

SB Remote power. Dimming options on request. See Optional Accessories Section.

S* Standard with programming to be carried out in the company.
S Standard with possibility of programming after purchase.

IDENTIFICATION DATA (Standard Code)

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
AFD	4000K	10°	0047934441AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	G*6
							885,0	1050	160200	144600	163	A8+1,97	
							1.200,0	1400	202750	183000	153	A7+1,84	
AFD	4000K	15°	0047934447AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	G*6
							885,0	1050	160200	144600	163	A8+1,97	
							1.200,0	1400	202750	183000	153	A7+1,84	
AFD	4000K	20°	0047934442AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	G*6
							885,0	1050	160200	144600	163	A8+1,97	
							1.200,0	1400	202750	183000	153	A7+1,84	
AFD	4000K	30°	0047934443AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	G*6
							885,0	1050	160200	135000	153	A7+1,84	
							1.200,0	1400	202750	171000	143	A6+1,72	
AFD	4000K	40°	0047934444AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	G*6
							885,0	1050	160200	144600	163	A8+1,97	
							1.200,0	1400	202750	183000	153	A7+1,84	
AFD	4000K	60°	0047934446AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	G*6
							885,0	1050	160200	135000	153	A7+1,84	
							1.200,0	1400	202750	171000	143	A6+1,72	
AFD	4000K	90°	0047934449AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	G*6
							885,0	1050	160200	135000	153	A7+1,84	
							1.200,0	1400	202750	171000	143	A6+1,72	
AFD	4000K	120°	0047934440AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	G*6
							885,0	1050	160200	135000	153	A7+1,84	
							1.200,0	1400	202750	171000	143	A6+1,72	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 1200

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
AND	4000K	10°	0047934441AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AND	4000K	15°	0047934447AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AND	4000K	20°	0047934442AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AND	4000K	30°	0047934443AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AND	4000K	40°	0047934444AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AND	4000K	60°	0047934446AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AND	4000K	90°	0047934449AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AND	4000K	120°	0047934440AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
ADA	4000K	10°	0047934441ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
ADA	4000K	15°	0047934447ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
ADA	4000K	20°	0047934442ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
ADA	4000K	30°	0047934443ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
ADA	4000K	40°	0047934444ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
ADA	4000K	60°	0047934446ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
ADA	4000K	90°	0047934449ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
ADA	4000K	120°	0047934440ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
SB	4000K	10°	0047934441SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
SB	4000K	15°	0047934447SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
SB	4000K	20°	0047934442SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
SB	4000K	30°	0047934443SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 1200

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
SB	4000K	40°	0047934444SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
SB	4000K	60°	0047934446SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
SB	4000K	90°	0047934449SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
SB	4000K	120°	0047934440SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AFD	5000K	10°	0047934451AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AFD	5000K	15°	0047934457AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AFD	5000K	20°	0047934452AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AFD	5000K	30°	0047934453AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AFD	5000K	40°	0047934454AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AFD	5000K	60°	0047934456AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AFD	5000K	90°	0047934459AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AFD	5000K	120°	0047934450AFD	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AND	5000K	10°	0047934451AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AND	5000K	15°	0047934457AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AND	5000K	20°	0047934452AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AND	5000K	30°	0047934453AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AND	5000K	40°	0047934454AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
AND	5000K	60°	0047934456AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AND	5000K	90°	0047934459AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AND	5000K	120°	0047934450AND	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 1200

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
ADA	5000K	10°	0047934451ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
ADA	5000K	15°	0047934457ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
ADA	5000K	20°	0047934452ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
ADA	5000K	30°	0047934453ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
ADA	5000K	40°	0047934454ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
ADA	5000K	60°	0047934456ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
ADA	5000K	90°	0047934459ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
ADA	5000K	120°	0047934450ADA	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
SB	5000K	10°	0047934451SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
SB	5000K	15°	0047934457SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
SB	5000K	20°	0047934452SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
SB	5000K	30°	0047934453SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
SB	5000K	40°	0047934454SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	102000	174	A10+2,1	
							885,0	1050	160200	144600	163	A8+1,97	G*6
							1.200,0	1400	202750	183000	153	A7+1,84	
SB	5000K	60°	0047934456SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
SB	5000K	90°	0047934459SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
SB	5000K	120°	0047934450SB	FOOTBALL LED S 1200W	I	>70	585,0	700	113000	95400	163	A8+1,96	
							885,0	1050	160200	135000	153	A7+1,84	G*6
							1.200,0	1400	202750	171000	143	A6+1,72	
AFD	5700K	10°	00479344F1AFD	FOOTBALL LED S 1200W	I	>80	585,0	700	101500	91350	156	A7+1,88	
							885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
AFD	5700K	15°	00479344F7AFD	FOOTBALL LED S 1200W	I	>80	585,0	700	101500	91350	156	A7+1,88	
							885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
AFD	5700K	20°	00479344F2AFD	FOOTBALL LED S 1200W	I	>80	585,0	700	101500	91350	156	A7+1,88	
							885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
AFD	5700K	30°	00479344F3AFD	FOOTBALL LED S 1200W	I	>80	585,0	700	101500	85650	146	A6+1,76	
							885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 1200

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
							585,0	700	101500	91350	156	A7+1,88	
AFD	5700K	40°	00479344F4AFD	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	85650	146	A6+1,76	
AFD	5700K	60°	00479344F6AFD	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	85650	146	A6+1,76	
AFD	5700K	90°	00479344F9AFD	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	85650	146	A6+1,76	
AFD	5700K	120°	00479344F0AFD	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	91350	156	A7+1,88	
AND	5700K	10°	00479344F1AND	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	91350	156	A7+1,88	
AND	5700K	15°	00479344F7AND	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	91350	156	A7+1,88	
AND	5700K	20°	00479344F2AND	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	85650	146	A6+1,76	
AND	5700K	30°	00479344F3AND	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	91350	156	A7+1,88	
AND	5700K	40°	00479344F4AND	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	85650	146	A6+1,76	
AND	5700K	60°	00479344F6AND	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	85650	146	A6+1,76	
AND	5700K	90°	00479344F9AND	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	85650	146	A6+1,76	
AND	5700K	120°	00479344F0AND	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	91350	156	A7+1,88	
ADA	5700K	10°	00479344F1ADA	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	91350	156	A7+1,88	
ADA	5700K	15°	00479344F7ADA	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	91350	156	A7+1,88	
ADA	5700K	20°	00479344F2ADA	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	85650	146	A6+1,76	
ADA	5700K	30°	00479344F3ADA	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	91350	156	A7+1,88	
ADA	5700K	40°	00479344F4ADA	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	85650	146	A6+1,76	
ADA	5700K	60°	00479344F6ADA	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	85650	146	A6+1,76	
ADA	5700K	90°	00479344F9ADA	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	85650	146	A6+1,76	
ADA	5700K	120°	00479344F0ADA	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 1200

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
							585,0	700	101500	91350	156	A7+1,88	
SB	5700K	10°	00479344F1SB	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	91350	156	A7+1,88	
SB	5700K	15°	00479344F7SB	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	91350	156	A7+1,88	
SB	5700K	20°	00479344F2SB	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	85650	146	A6+1,76	
SB	5700K	30°	00479344F3SB	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	91350	156	A7+1,88	
SB	5700K	40°	00479344F4SB	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	129450	146	A6+1,76	G*6
							1.200,0	1400	182000	163800	137	A5+1,64	
							585,0	700	101500	85650	146	A6+1,76	
SB	5700K	60°	00479344F6SB	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	85650	146	A6+1,76	
SB	5700K	90°	00479344F9SB	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							585,0	700	101500	85650	146	A6+1,76	
SB	5700K	120°	00479344F0SB	FOOTBALL LED S 1200W	I	>80	885,0	1050	143850	121200	137	A5+1,65	G*6
							1.200,0	1400	182000	153600	128	A4+1,54	
							483,0	400	91750	72600	150	A7+1,81	
AFD	4000K	AS	004813444AAFD	FOOTBALL LED AS 1200W	I	>70	876,0	700	160250	126000	144	A6+1,73	G*2
							1.200,0	950	216100	171000	143	A6+1,72	
							483,0	400	91750	72600	150	A7+1,81	
AND	4000K	AS	004813444AAND	FOOTBALL LED AS 1200W	I	>70	876,0	700	160250	126000	144	A6+1,73	G*2
							1.200,0	950	216100	171000	143	A6+1,72	
							483,0	400	91750	72600	150	A7+1,81	
ADA	4000K	AS	004813444AADA	FOOTBALL LED AS 1200W	I	>70	876,0	700	160250	126000	144	A6+1,73	G*2
							1.200,0	950	216100	171000	143	A6+1,72	
							483,0	400	91750	72600	150	A7+1,81	
SB	4000K	AS	004813444ASB	FOOTBALL LED AS 1200W	I	>70	876,0	700	160250	126000	144	A6+1,73	G*2
							1.200,0	950	216100	171000	143	A6+1,72	
							483,0	400	91750	72600	150	A7+1,81	
AFD	5000K	AS	004813445AAFD	FOOTBALL LED AS 1200W	I	>70	876,0	700	160250	126000	144	A6+1,73	G*2
							1.200,0	950	216100	171000	143	A6+1,72	
							483,0	400	91750	72600	150	A7+1,81	
AND	5000K	AS	004813445AAND	FOOTBALL LED AS 1200W	I	>70	876,0	700	160250	126000	144	A6+1,73	G*2
							1.200,0	950	216100	171000	143	A6+1,72	
							483,0	400	91750	72600	150	A7+1,81	
ADA	5000K	AS	004813445AADA	FOOTBALL LED AS 1200W	I	>70	876,0	700	160250	126000	144	A6+1,73	G*2
							1.200,0	950	216100	171000	143	A6+1,72	
							483,0	400	91750	72600	150	A7+1,81	
SB	5000K	AS	004813445ASB	FOOTBALL LED AS 1200W	I	>70	876,0	700	160250	126000	144	A6+1,73	G*2
							1.200,0	950	216100	171000	143	A6+1,72	
							483,0	400	84650	67000	139	A5+1,67	
AFD	5700K	AS	00481344FAAFD	FOOTBALL LED AS 1200W	I	>80	876,0	700	146900	116250	133	A4+1,6	G*2
							1.200,0	950	199400	157800	132	A4+1,58	
							483,0	400	84650	67000	139	A5+1,67	
AND	5700K	AS	00481344FAAND	FOOTBALL LED AS 1200W	I	>80	876,0	700	146900	116250	133	A4+1,6	G*2
							1.200,0	950	199400	157800	132	A4+1,58	
							483,0	400	84650	67000	139	A5+1,67	
ADA	5700K	AS	00481344FAADA	FOOTBALL LED AS 1200W	I	>80	876,0	700	146900	116250	133	A4+1,6	G*2
							1.200,0	950	199400	157800	132	A4+1,58	
							483,0	400	84650	67000	139	A5+1,67	
SB	5700K	AS	00481344FASB	FOOTBALL LED AS 1200W	I	>80	876,0	700	146900	116250	133	A4+1,6	G*2
							1.200,0	950	199400	157800	132	A4+1,58	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 1200

The values given are nominal values. Luminous flux tolerance +/-7%, power tolerance +/-10%.

OPTIONAL ACCESSORIES



000063479
SYMMETRICAL FOOTBALL LED DEFLECTOR
000063478
ASYMMETRICAL 15° FOOTBALL LED BAFFLE




000090723
LASER POINTER + MOUNTING BRACKET



000090724
OPTICAL POINTER + MOUNTING BRACKET



000034068
ANTI-SHOCK GRID

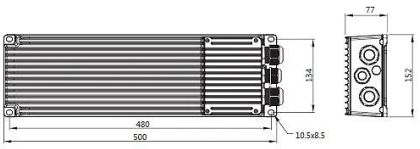

W Out	I out	Kg
3x500	3x500-1400	5,60

000054977DA
REMOTE POWER SUPPLY UNIT FOR SB: DALI
000054977DMX
REMOTE POWER SUPPLY UNIT FOR SB: RDM/DMX

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication