FLOODLIGHTS

FOOTBALL LED 800

EN

FAEBER LIGHTING SYSTEM


ENERGY SAVING

IP66 IK08 RGO

F

220-240V
50-60Hz



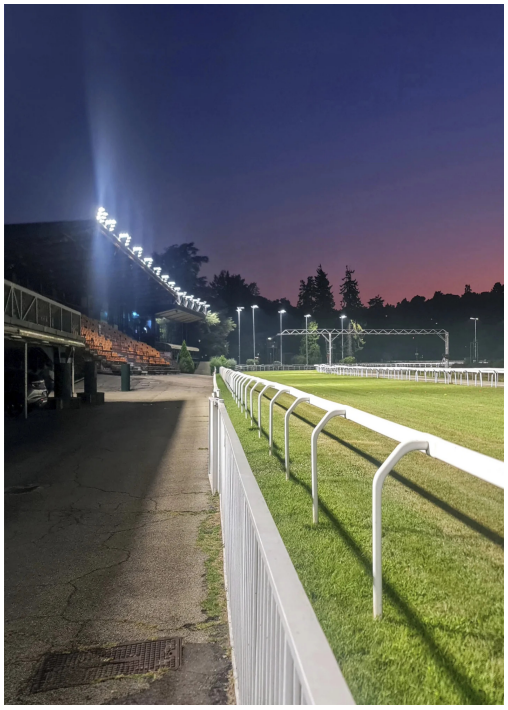

GENERAL CHARACTERISTICS

APPLICATION	Floodlights
FIXING	Bracket with tilt adjustment goniometer
WIND EXPOSURE	0.23 m²
POWER W	322-800
FLUX Lm Out (min-max)	41600-122000
LED RANGE	S:192-AS:288
COLOR TEMPERATURE	4000K-5000K-5700K-RGBW
IRC	>70
INSULATION CLASS	I
DEGREE OF PROTECTION	IP66
MECHANICAL RESISTANCE	IK08
BODY	Body and frame in die-cast aluminium, polyester powder coated.
COLOR	GREY RAL 7016
GASKET	Silicone.
SCREEN	4 mm thick tempered protective glass.
ULOR	0
WEIGHT Max (Kg)	28.9
POWER SUPPLY UNIT	Power unit placed remotely at a maximum distance of 200m (SB version) or mounted on the body of the appliance on stainless steel plates (AND, AFD, ADA versions).
POWER SUPPLY	220÷240V 50/60Hz cos φ 0.95.
DRIVER PRESUMED LIFE	100.000h @ Tc life.
OVERVOLTAGE PROTECTION	Solutions with alim. on board protected with SPD placed in the junction box, or in the power supply for remote driver solution. Protected module with equipotential network. Discharge immunity level >10kV both common and differential mode.
CONNECTION	Watertight protection box located on the bracket of the appliance and equipped with a 4.0mm2 terminal block and M20 cable gland for 400W and M25 for 800-1200W.


LED MODULE

LED MODULE	S: 96 single die power LED modules. AS: 144 multi die power LED modules. Both of the latest gen.
EFFICIENCY	S:182lm/W@1050mA AS:170lm/W@640mA 25°C.
LED USEFUL LIFE	> 100.000h L90B10.
SECONDARY OPTICS	S: Stabilized PMMA. AS: anodized aluminum reflector.

DIMENSIONS

VERTICAL MOUNTING

HORIZONTAL MOUNTING

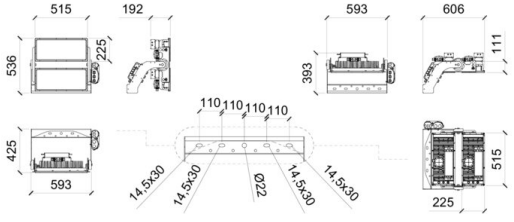

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026


Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 800

PHOTOMETRY

Final code	Optical
1	10°
7	15°
2	20°
3	30°
4	40°
6	60°
9	90°
0	120°
A	AS

Photobiological risk group according to EN62471: EXEMPT (RG0)

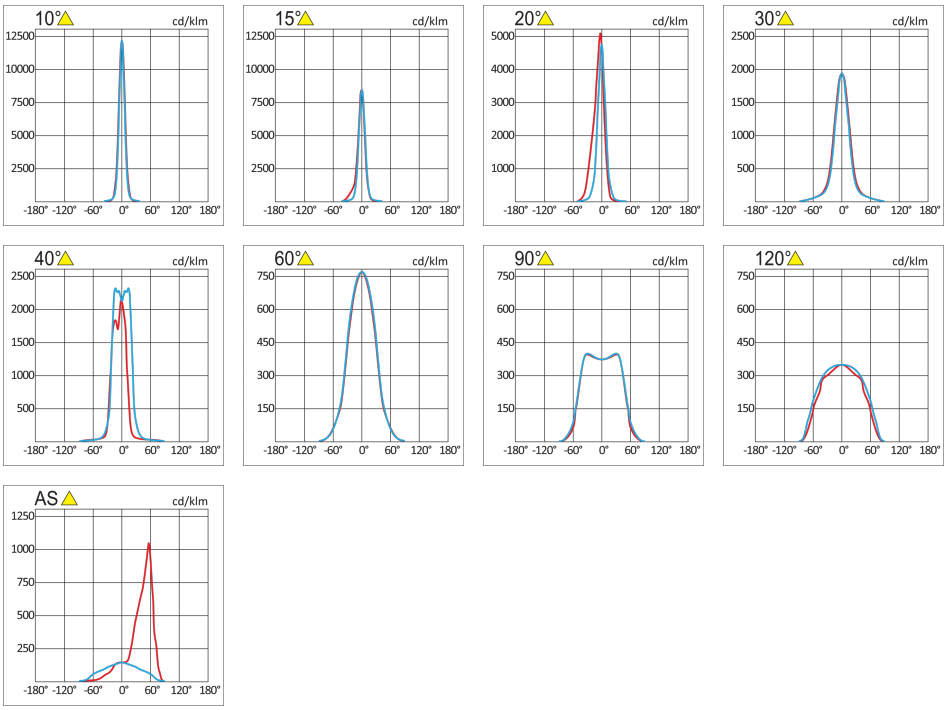

DIMMINGS

	Rset	Switch	Bipower	1-10V	Dali	CLO	Crono timer	Mains dim	Radio Waves	Conveyed Waves	Zhaga socket	Nema 7Pins	Bluetooth	DMX
AFD	/	/	/	/	/	S*	S*	/	/	/	/	/	/	
AND	/	/	/	/	/	/	/	/	/	/	/	/	/	
ADA	/	/	/	/	S*	/	/	/	/	/	/	/	/	
AAN	/	/	/	S	/	/	/	/	/	/	/	/	/	

SB Remote power. Dimming options on request. See Optional Accessories Section.

S* Standard with programming to be carried out in the company.
S Standard with possibility of programming after purchase.

IDENTIFICATION DATA (Standard Code)

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
AFD	4000K	10°	0047924441AFD	FOOTBALL LED S 800W	I	>70	390,0 590,0 800,0	700 1050 1400	75350 106800 135150	68000 96400 122000	174 163 153	A10+2,18 A8+1,97 A7+1,84	G*6
AFD	4000K	15°	0047924447AFD	FOOTBALL LED S 800W	I	>70	390,0 590,0 800,0	700 1050 1400	75350 106800 135150	68000 96400 122000	174 163 153	A10+2,18 A8+1,97 A7+1,84	G*6
AFD	4000K	20°	0047924442AFD	FOOTBALL LED S 800W	I	>70	390,0 590,0 800,0	700 1050 1400	75350 106800 135150	68000 96400 122000	174 163 153	A10+2,18 A8+1,97 A7+1,84	G*6
AFD	4000K	30°	0047924443AFD	FOOTBALL LED S 800W	I	>70	390,0 590,0 800,0	700 1050 1400	75350 106800 135150	63600 90000 114000	163 153 143	A9+2,04 A7+1,84 A6+1,72	G*6
AFD	4000K	40°	0047924444AFD	FOOTBALL LED S 800W	I	>70	390,0 590,0 800,0	700 1050 1400	75350 106800 135150	68000 96400 122000	174 163 153	A10+2,18 A8+1,97 A7+1,84	G*6
AFD	4000K	60°	0047924446AFD	FOOTBALL LED S 800W	I	>70	390,0 590,0 800,0	700 1050 1400	75350 106800 135150	63600 90000 114000	163 153 143	A9+2,04 A7+1,84 A6+1,72	G*6
AFD	4000K	90°	0047924449AFD	FOOTBALL LED S 800W	I	>70	390,0 590,0 800,0	700 1050 1400	75350 106800 135150	63600 90000 114000	163 153 143	A9+2,04 A7+1,84 A6+1,72	G*6
AFD	4000K	120°	0047924440AFD	FOOTBALL LED S 800W	I	>70	390,0 590,0 800,0	700 1050 1400	75350 106800 135150	63600 90000 114000	163 153 143	A9+2,04 A7+1,84 A6+1,72	G*6

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 800

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
AND	4000K	10°	0047924441AND	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
AND	4000K	15°	0047924447AND	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
AND	4000K	20°	0047924442AND	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
AND	4000K	30°	0047924443AND	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
AND	4000K	40°	0047924444AND	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
AND	4000K	60°	0047924446AND	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
AND	4000K	90°	0047924449AND	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
AND	4000K	120°	0047924440AND	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
ADA	4000K	10°	0047924441ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
ADA	4000K	15°	0047924447ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
ADA	4000K	20°	0047924442ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
ADA	4000K	30°	0047924443ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
ADA	4000K	40°	0047924444ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
ADA	4000K	60°	0047924446ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
ADA	4000K	90°	0047924449ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
ADA	4000K	120°	0047924440ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
SB	4000K	10°	0047924441SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
SB	4000K	15°	0047924447SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
SB	4000K	20°	0047924442SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
SB	4000K	30°	0047924443SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 800

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
							390,0	700	75350	68000	174	A10+2,18	
SB	4000K	40°	0047924444SB	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	63600	163	A9+2,04	
SB	4000K	60°	0047924446SB	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	63600	163	A9+2,04	
SB	4000K	90°	0047924449SB	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	63600	163	A9+2,04	
SB	4000K	120°	0047924440SB	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	68000	174	A10+2,18	
AFD	5000K	10°	0047924451AFD	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	68000	174	A10+2,18	
AFD	5000K	15°	0047924457AFD	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	68000	174	A10+2,18	
AFD	5000K	20°	0047924452AFD	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	63600	163	A9+2,04	
AFD	5000K	30°	0047924453AFD	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	68000	174	A10+2,18	
AFD	5000K	40°	0047924454AFD	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	63600	163	A9+2,04	
AFD	5000K	60°	0047924456AFD	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	63600	163	A9+2,04	
AFD	5000K	90°	0047924459AFD	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	63600	163	A9+2,04	
AFD	5000K	120°	0047924450AFD	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	68000	174	A10+2,18	
AND	5000K	10°	0047924451AND	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	68000	174	A10+2,18	
AND	5000K	15°	0047924457AND	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	68000	174	A10+2,18	
AND	5000K	20°	0047924452AND	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	63600	163	A9+2,04	
AND	5000K	30°	0047924453AND	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	68000	174	A10+2,18	
AND	5000K	40°	0047924454AND	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	96400	163	A8+1,97	G*6
							800,0	1400	135150	122000	153	A7+1,84	
							390,0	700	75350	63600	163	A9+2,04	
AND	5000K	60°	0047924456AND	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	63600	163	A9+2,04	
AND	5000K	90°	0047924459AND	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	
							390,0	700	75350	63600	163	A9+2,04	
AND	5000K	120°	0047924450AND	FOOTBALL LED S 800W	I	>70	590,0	1050	106800	90000	153	A7+1,84	G*6
							800,0	1400	135150	114000	143	A6+1,72	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 800

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
ADA	5000K	10°	0047924451ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
ADA	5000K	15°	0047924457ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
ADA	5000K	20°	0047924452ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
ADA	5000K	30°	0047924453ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
ADA	5000K	40°	0047924454ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
ADA	5000K	60°	0047924456ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
ADA	5000K	90°	0047924459ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
ADA	5000K	120°	0047924450ADA	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
SB	5000K	10°	0047924451SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
SB	5000K	15°	0047924457SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
SB	5000K	20°	0047924452SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
SB	5000K	30°	0047924453SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
SB	5000K	40°	0047924454SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	68000	174	A10+2,18	G*6
							590,0	1050	106800	96400	163	A8+1,97	
							800,0	1400	135150	122000	153	A7+1,84	
SB	5000K	60°	0047924456SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
SB	5000K	90°	0047924459SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
SB	5000K	120°	0047924450SB	FOOTBALL LED S 800W	I	>70	390,0	700	75350	63600	163	A9+2,04	G*6
							590,0	1050	106800	90000	153	A7+1,84	
							800,0	1400	135150	114000	143	A6+1,72	
AFD	5700K	10°	00479244F1AFD	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	G*6
							590,0	1050	95900	86300	146	A6+1,76	
							800,0	1400	121350	109200	137	A5+1,64	
AFD	5700K	15°	00479244F7AFD	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	G*6
							590,0	1050	95900	86300	146	A6+1,76	
							800,0	1400	121350	109200	137	A5+1,64	
AFD	5700K	20°	00479244F2AFD	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	G*6
							590,0	1050	95900	86300	146	A6+1,76	
							800,0	1400	121350	109200	137	A5+1,64	
AFD	5700K	30°	00479244F3AFD	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	G*6
							590,0	1050	95900	80800	137	A5+1,65	
							800,0	1400	121350	102400	128	A4+1,54	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 800

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
AFD	5700K	40°	00479244F4AFD	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
AFD	5700K	60°	00479244F6AFD	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
AFD	5700K	90°	00479244F9AFD	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
AFD	5700K	120°	00479244F0AFD	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
AND	5700K	10°	00479244F1AND	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
AND	5700K	15°	00479244F7AND	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
AND	5700K	20°	00479244F2AND	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
AND	5700K	30°	00479244F3AND	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
AND	5700K	40°	00479244F4AND	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
AND	5700K	60°	00479244F6AND	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
AND	5700K	90°	00479244F9AND	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
AND	5700K	120°	00479244F0AND	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
ADA	5700K	10°	00479244F1ADA	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
ADA	5700K	15°	00479244F7ADA	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
ADA	5700K	20°	00479244F2ADA	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
ADA	5700K	30°	00479244F3ADA	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
ADA	5700K	40°	00479244F4ADA	FOOTBALL LED S 800W	I	>80	390,0	700	67650	60900	156	A8+1,95	
							590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
ADA	5700K	60°	00479244F6ADA	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
ADA	5700K	90°	00479244F9ADA	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
ADA	5700K	120°	00479244F0ADA	FOOTBALL LED S 800W	I	>80	390,0	700	67650	57100	146	A7+1,83	
							590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 800

Dimm	Kelvin	Photom	Code	Name	CL	CRI	Watt	mA	Lumen In	Lumen Out	Efficiency (lm/W)	IPEA	CIL
							390,0	700	67650	60900	156	A8+1,95	
SB	5700K	10°	00479244F1SB	FOOTBALL LED S 800W	I	>80	590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
							390,0	700	67650	60900	156	A8+1,95	
SB	5700K	15°	00479244F7SB	FOOTBALL LED S 800W	I	>80	590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
							390,0	700	67650	60900	156	A8+1,95	
SB	5700K	20°	00479244F2SB	FOOTBALL LED S 800W	I	>80	590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
							390,0	700	67650	57100	146	A7+1,83	
SB	5700K	30°	00479244F3SB	FOOTBALL LED S 800W	I	>80	590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
							390,0	700	67650	60900	156	A8+1,95	
SB	5700K	40°	00479244F4SB	FOOTBALL LED S 800W	I	>80	590,0	1050	95900	86300	146	A6+1,76	G*6
							800,0	1400	121350	109200	137	A5+1,64	
							390,0	700	67650	57100	146	A7+1,83	
SB	5700K	60°	00479244F6SB	FOOTBALL LED S 800W	I	>80	590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
							390,0	700	67650	57100	146	A7+1,83	
SB	5700K	90°	00479244F9SB	FOOTBALL LED S 800W	I	>80	590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
							390,0	700	67650	57100	146	A7+1,83	
SB	5700K	120°	00479244F0SB	FOOTBALL LED S 800W	I	>80	590,0	1050	95900	80800	137	A5+1,65	G*6
							800,0	1400	121350	102400	128	A4+1,54	
							322,0	400	61150	48400	150	A7+1,88	
AFD	4000K	AS	004812444AAFD	FOOTBALL LED AS 800W	I	>70	584,0	700	106850	84000	144	A6+1,73	G*2
							800,0	950	144050	114000	143	A6+1,72	
							322,0	400	61150	48400	150	A7+1,88	
AND	4000K	AS	004812444AAND	FOOTBALL LED AS 800W	I	>70	584,0	700	106850	84000	144	A6+1,73	G*2
							800,0	950	144050	114000	143	A6+1,72	
							322,0	400	61150	48400	150	A7+1,88	
ADA	4000K	AS	004812444AADA	FOOTBALL LED AS 800W	I	>70	584,0	700	106850	84000	144	A6+1,73	G*2
							800,0	950	144050	114000	143	A6+1,72	
							322,0	400	61150	48400	150	A7+1,88	
SB	4000K	AS	004812444ASB	FOOTBALL LED AS 800W	I	>70	584,0	700	106850	84000	144	A6+1,73	G*2
							800,0	950	144050	114000	143	A6+1,72	
							322,0	400	61150	48400	150	A7+1,88	
AFD	5000K	AS	004812445AAFD	FOOTBALL LED AS 800W	I	>70	584,0	700	106850	84000	144	A6+1,73	G*2
							800,0	950	144050	114000	143	A6+1,72	
							322,0	400	61150	48400	150	A7+1,88	
AND	5000K	AS	004812445AAND	FOOTBALL LED AS 800W	I	>70	584,0	700	106850	84000	144	A6+1,73	G*2
							800,0	950	144050	114000	143	A6+1,72	
							322,0	400	61150	48400	150	A7+1,88	
ADA	5000K	AS	004812445AADA	FOOTBALL LED AS 800W	I	>70	584,0	700	106850	84000	144	A6+1,73	G*2
							800,0	950	144050	114000	143	A6+1,72	
							322,0	400	61150	48400	150	A7+1,88	
SB	5000K	AS	004812445ASB	FOOTBALL LED AS 800W	I	>70	584,0	700	106850	84000	144	A6+1,73	G*2
							800,0	950	144050	114000	143	A6+1,72	
							322,0	400	56400	44650	139	A6+1,73	
AFD	5700K	AS	00481244FAAFD	FOOTBALL LED AS 800W	I	>80	584,0	700	97950	77500	133	A4+1,6	G*2
							800,0	950	132900	105200	132	A4+1,58	
							322,0	400	56400	44650	139	A6+1,73	
AND	5700K	AS	00481244FAAND	FOOTBALL LED AS 800W	I	>80	584,0	700	97950	77500	133	A4+1,6	G*2
							800,0	950	132900	105200	132	A4+1,58	
							322,0	400	56400	44650	139	A6+1,73	
ADA	5700K	AS	00481244FAADA	FOOTBALL LED AS 800W	I	>80	584,0	700	97950	77500	133	A4+1,6	G*2
							800,0	950	132900	105200	132	A4+1,58	
							322,0	400	56400	44650	139	A6+1,73	
SB	5700K	AS	00481244FASB	FOOTBALL LED AS 800W	I	>80	584,0	700	97950	77500	133	A4+1,6	G*2
							800,0	950	132900	105200	132	A4+1,58	

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication

FOOTBALL LED 800

The values given are nominal values. Luminous flux tolerance +/-7%, power tolerance +/-10%.

OPTIONAL ACCESSORIES



000063479
SYMMETRICAL FOOTBALL LED DEFLECTOR
000063478
ASYMMETRICAL 15° FOOTBALL LED BAFFLE




000090723
LASER POINTER + MOUNTING BRACKET



000090724
OPTICAL POINTER + MOUNTING BRACKET



000034068
ANTI-SHOCK GRID

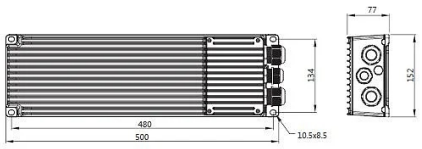

W Out	I out	Kg
2x500	2x500-1400	5,10

000054991DMX
REMOTE POWER SUPPLY UNIT FOR SB: RDM/DMX
000054991DA
REMOTE POWER SUPPLY UNIT FOR SB: DALI

FAEBER LIGHTING SYSTEM s.p.a.
Via Papa Giovanni XXIII - Ang. Via Padre Pio - 21040 Uboldo (VA) - Italy
Tel. +39.0296787811 - Fax +39.0296788846 - info@faeber.com -www.faeber.com
P. IVA: 01863440168 - C.F.: 07621480156

Ultimo aggiornamento:14/9/2026

Faeber Lighting System S.p.A. It does not assume any responsibility for printer's errors eventually present in this publication; also reserves the right to make changes to their products at any time without notice and obligation of communication